



PERFORMER series

FEATURES

- # CB & 10m Mobile antenna
- # Tunable from 27 to 28.5 MHz
- # 17/7 PH tapered stainless steel whip
- # 180° adjustable whip, detachable for car-wash
- # Protection from static discharges DC-Ground
- # Suitable for magnetic mount installation

TECHNICAL DATA

Type: base loaded
 Impedance: 50 Ω
 Frequency range: 27 ... 28.5 MHz
 Polarization: linear vertical
 SWR @ res. freq.: ≤ 1.2
 Max. power: 200 Watts (CW) continuous
 1000 Watts (CW) short time
 Bandwidth @ SWR ≤ 2:
 PERFORMER P-600 ≥ 680 kHz (60 channel)
 PERFORMER P-800 ≥ 1400 kHz (120 channel)
 PERFORMER P-1000 ≥ 2000 kHz (180 channel)
 Mounting:
 PERFORMER series hole Ø 12.5 mm
 PERFORMER PL series UHF-male (PL 259)
 Cable length / Type:
 PERFORMER series 4 m / RG 58
 PERFORMER PL series not supplied
 Height (approx.):
 PERFORMER P-600 1250 mm
 PERFORMER P-800 1650 mm
 PERFORMER P-1000 1950 mm
 Weight (approx.): 600 gr


P/N 2218005.50 PERFORMER P-600
 P/N 2218105.50 PERFORMER P-800
 P/N 2218205.50 PERFORMER P-1000

P/N 2218005.51 PERFORMER P-600 PL
 P/N 2218105.51 PERFORMER P-800 PL
 P/N 2218205.51 PERFORMER P-1000 PL

INSTALLATION ALTERNATIVES



HOLE INSTALLATION

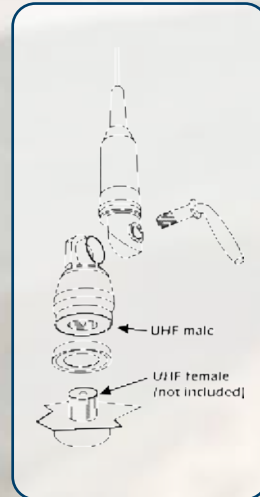

UHF-PL INSTALLATION



AVAILABLE MAGNETIC MOUNT TYPES

MAG 125 PL 2502602.05
 MAG 145 PL 2502702.05
 MAG 160 PL 2502802.05

STRONG DIE-CAST JOINT
 LOCKING HANDLE
 for 180° Tilting

